

03-16-00

A
JCS71 U.S. PRO
09/524854
03/14/00

Customer No. 20350
TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
(650) 326-2400

Attorney Docket No. 19880-001610US

"Express Mail" Label No. EL515937605US

Date of Deposit: March 14, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above, addressed to:

ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
Washington, D.C. 20231

Sir:
[] filed herewith for filing under 37 CFR 1.53(b) is the
[X] patent application of
[] continuation patent application of
[] divisional patent application of
[] continuation-in-part patent application of

Assistant Commissioner for Patents
Washington, D.C. 20231

By: *Kim Beley*

inventor(s)/Applicant Identifier: Sadik Bayraktari, Donald F. Gordon, Edward A. Ludvig, Eugene Gershtein, Jeremy S. Edmonds, John P. Comito, and Alfred Li

For: BANDWIDTH MANAGEMENT TECHNIQUES FOR DELIVERY OF INTERACTIVE PROGRAM GUIDE

[X] This application claims priority from each of the following Application Nos./filing dates: Provisional Application No. 60/178,100, filed on January 26, 2000, the disclosure(s) of which is (are) incorporated by reference.

[] Please amend this application by adding the following before the first sentence: "This application is a [] continuation [] continuation-in-part of and claims the benefit of U.S. Application No. 60/_____, filed _____, the disclosure of which is incorporated by reference."

Enclosed are:

- [X] 15 page(s) of specification
- [X] 3 page(s) of claims
- [X] 1 page of Abstract
- [X] 10 sheet(s) of [] formal [X] informal drawing(s).

[] An assignment of the invention to _____

[X] A [] signed [X] unsigned Declaration & Power of Attorney

[] A [] signed [] unsigned Declaration.

[] A Power of Attorney by Assignee with Certificate Under 37 CFR Section 3.73(b).

[] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27 [] is enclosed [] was filed in the prior application and small entity status is still proper and desired.

[] A certified copy of a _____ application.

[] Information Disclosure Statement under 37 CFR 1.97.

[] A petition to extend time to respond in the parent application.

[] Notification of change of [] power of attorney [] correspondence address filed in prior application.

In view of the unsigned Declaration and Power of Attorney as filed with the Application and pursuant to 37 CFR §1.53(f), Applicant requests deferral of the filing fee until submission of the Missing Parts of Application.

DO NOT CHARGE THE FILING FEE AT THIS TIME.

- [X] Please charge any additional fees associated with this paper or during the pendency of this application to Deposit Account No. 20-1430.
- [] The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)

[] A check for \$ _____ is enclosed.

1 extra copy(s) of this sheet are enclosed.

Respectfully submitted,
TOWNSEND and TOWNSEND and CREW LLP

James S. Okamoto
James S. Okamoto
Reg. No.: 40,110
Attorneys for Applicant

Telephone: (650) 326-2400
Facsimile: (650) 326-2422

PATENT APPLICATION
BANDWIDTH MANAGEMENT TECHNIQUES FOR DELIVERY OF
INTERACTIVE PROGRAM GUIDE

Inventors:

Sadik Bayrakeri, a citizen of Turkey, residing at,
733 Shell Boulevard #104
Foster City, CA 94404

Donald F. Gordon, a citizen of United States, residing at,
465 Gabilan Street #10
Los Altos, CA 94022

Edward A. Ludvig, a citizen of Canada, residing at,
831 Canyon Road
Redwood City, CA 94061

Eugene Gershtein, a citizen of United States, residing at,
401B Cork Harbour Circle
Redwood Shores, CA 94065

Jeremy S. Edmonds, a citizen of United States, residing at,
18923 Sydney Circle
Castro Valley, CA 94546

John P. Comito, a citizen of United States, residing at,
907 Pleasant Hill Road
Redwood City, CA 94061

Alfred Li, a citizen of Hong Kong, residing at,
161 Positano Circle
Redwood City, CA 94065

Assignee:

DIVA Systems Corporation
800 Saginaw Drive
Redwood City, CA 94063

Entity:

Small business concern

BANDWIDTH MANAGEMENT TECHNIQUES FOR DELIVERY OF INTERACTIVE PROGRAM GUIDE

5 RELATED APPLICATIONS

The present application is based on co-pending U.S. Provisional Patent Application Serial No. 60/178,100, filed January 26, 2000, inventors Sadik Bayrakeri and Donald F. Gordon, and entitled "BANDWIDTH MANAGEMENT TECHNIQUES FOR DELIVERY OF INTERACTIVE PROGRAM GUIDE." (Attorney Docket No. 19880-001600US)

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to communications systems in general. More specifically, the invention relates to video communications systems and interactive program guides for video programming.

2. Description of the Background Art

Over the past few years, the television industry has seen a transformation in a variety of techniques by which its programming is distributed to consumers. Cable television systems are doubling or even tripling system bandwidth with the migration to hybrid fiber coax (HFC) cable plant. Customers unwilling to subscribe to local cable systems have switched in high numbers to direct broadcast satellite (DBS) systems. And, a variety of other approaches have been attempted focusing primarily on high bandwidth digital technologies, intelligent two way set top boxes, or other methods of trying to offer service differentiated from standard cable and over the air broadcast systems.

With this increase in bandwidth, the number of programming choices has also increased. Leveraging off the availability of more intelligent set top boxes, several companies such as Starsight Telecast Inc. and TV Guide, Inc. have developed elaborate systems for providing an interactive listing of a vast array of channel offerings, expanded textual information about individual programs, the ability to look forward to plan

television viewing as much as several weeks in advance, and the option of automatically programming a VCR to record a future broadcast of a television program.

Unfortunately, the existing program guides have several drawbacks. They tend to require a significant amount of memory, some of them needing upwards of one megabyte of memory at the set top terminal (STT). They are very slow to acquire their current database of programming information when they are turned on for the first time or are subsequently restarted (e.g., a large database may be downloaded to a STT using only a vertical blanking interval (VBI) data insertion technique). Disadvantageously, such slow database acquisition may result in out of date database information or, in the case of a pay per view (PPV) or video on demand (VOD) system, limited scheduling flexibility for the information provider.

The use of compression techniques to reduce the amount of data to be transmitted may increase the speed of transmitting program guide information. In several communications systems, the data to be transmitted is compressed so that the available transmission bandwidth is used more efficiently. For example, the Moving Pictures Experts Group (MPEG) has promulgated several standards relating to digital data delivery systems. The first, known as MPEG-1 refers to ISO/IEC standards 11172 and is incorporated herein by reference. The second, known as MPEG-2, refers to ISO/IEC standards 13818 and is also incorporated herein by reference. A compressed digital video system is described in the Advanced Television Systems Committee (ATSC) digital television standard document A/53, and is incorporated herein by reference.

The above-referenced standards describe data processing and manipulation techniques that are well suited to the compression and delivery of video, audio and other information using fixed or variable rate digital communications systems. In particular, the above-referenced standards, and other "MPEG-like" standards and techniques, compress, illustratively, video information using intra-frame coding techniques (such as run-length coding, Huffman coding and the like) and inter-frame coding techniques (such as forward and backward predictive coding, motion compensation and the like). Specifically, in the case of video processing systems, MPEG and MPEG-like video processing systems are characterized by prediction-based compression encoding of video frames with or without intra- and/or inter-frame motion compensation encoding.

However, the MPEG-1 and MPEG-2 standards have, in some instances, very strict elementary stream and transport stream formats, causing usage of extra bandwidth for certain applications. For example, if a number of interactive program guide (IPG) pages were created as video sequences, only limited number of pages could be
5 encoded into a transport stream(s) at a specified bandwidth.

Therefore, it is desirable to provide techniques for more efficiently utilizing a limited and finite bandwidth for transmitting program guide video sequences to set-top terminals.

SUMMARY OF THE INVENTION

10 The present invention provides techniques for more efficient utilization of the finite bandwidth available for distribution of interactive program guide (IPG) video sequences. In this invention, novel systems and methods are introduced to provide bandwidth management to handle broadcast, narrowcast, pointcast, and "shared" pointcast streams in combination. Bandwidth management techniques in an end-to-end
15 system play a key role in latency reduction and improving overall efficiency of the interactive system.

The present invention includes methods for managing delivery of video sequences for an IPG to a plurality of terminals. The methods comprise delivery by way of various techniques, including broadcasting, pointcasting, narrowcasting, and variants
20 and combinations of those techniques.

One embodiment of the present invention is a method that includes the steps of: pre-allocating a broadcast bandwidth in the communications network for common video sequences to be transmitted by a broadcast technique; transmitting in the broadcast bandwidth the common video sequences to the plurality of terminals by way of
25 the broadcast technique; receiving a request for a specific video sequence from a specific terminal via the communications network; allocating a demandcast bandwidth in the communications network for the specific video sequence; and transmitting in the demandcast bandwidth the specific video sequence to the specific terminal via the communications network.

BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings.

5 Figure 1 depicts an illustrative communications network 100 for distributing video sequences to a plurality of terminals in accordance with an embodiment of the present invention.

10 Figure 2A is a flow chart showing a method 200 for broadcasting interactive program guide (IPG) pages in accordance with an embodiment of the present invention.

 Figure 2B depicts a topology 250 for broadcasting IPG pages in accordance with an embodiment of the present invention.

 Figure 3A is a flow chart showing a method 300 for pointcasting IPG pages in accordance with an embodiment of the present invention.

15 Figure 3B depicts a topology 350 for pointcasting IPG pages in accordance with an embodiment of the present invention.

 Figure 4A is a flow chart showing a push method 400 for narrowcasting IPG pages in accordance with an embodiment of the present invention.

20 Figure 4B depicts a push topology 450 for narrowcasting IPG pages in accordance with an embodiment of the present invention.

 Figure 5A is a flow chart showing a pull or demandcast method 500 for narrowcasting IPG pages in accordance with an embodiment of the present invention.

 Figure 5B depicts a pull or demandcast topology 550 for narrowcasting IPG pages in accordance with an embodiment of the present invention.

25 Figure 6A is a flow chart showing a method 600 for shared pointcasting of IPG pages in accordance with an embodiment of the present invention.

Figure 6B depicts a pull or demandcast topology 650 for shared pointcasting of IPG pages in accordance with an embodiment of the present invention.

Figure 6C is a flow chart showing a method 660 of terminating (or continuing) shared pointcasts of IPG pages in accordance with an embodiment of the present invention.

Figure 7 depicts a first system 700 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention.

Figure 8 depicts a second system 800 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention.

Figure 9 depicts an example of one frame taken from a video sequence that can be encoded using the present invention.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

Figure 1 depicts an illustrative communications network 100 for distributing video sequences to a plurality of terminals in accordance with an embodiment of the present invention. The illustrative network 100 comprises a cable distribution network, but other types of distribution networks may also be used. The network 100 includes one or more head-ends 102, one or more centers for local neighborhood equipment 104, a plurality of distribution nodes 106, and a plurality of subscriber stations 108. The local neighborhood equipment (LNE) 104 may be located, for example, at remote hubs of a cable distribution network. The end-user terminals 108 may comprise, for example, interactive set-top terminals (STT) or other devices with similar interactive functionalities.

Figure 2A is a flow chart showing a push method 200 for broadcasting interactive program guide (IPG) pages in accordance with an embodiment of the present invention. As described below, the method 200 includes four steps.

In a first step 202, a first set of IPG pages to be broadcast are predetermined. The first set of IPG pages may comprise video sequences, for example,

for a current time period. For instance, if the current time is 1:07 pm, then the current time period may include programming from 1:00 pm to 2:30 pm, assuming a 90 minute time period.

In a second step 204, a second set of IPG pages to be broadcast are
5 predetermined. The second set of IPG pages may comprise video sequences, for example, for a prime time period. Such a prime time period is a time period during which a large number of viewers typically watch TV programming. For example, the prime time period may include programming from 6:00 pm to 9:00 pm.

In a third step 206, bandwidth to broadcast the first and second sets of IPG
10 pages is allocated in the distribution system for that purpose. For example, as described below in relation to Figs. 7 and 8, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 allocates within the in-band network the necessary bandwidth to broadcast the first and second sets of IPG pages to the set-top terminals (STT) 108. If the first and second sets overlap, then only the non-redundant
15 video sequences need to be broadcast and so only enough bandwidth to broadcast the non-redundant video sequences needs to be allocated. Such a situation may happen, for example, when the current time period is within prime time.

In a fourth step 208, the IPG pages of the first and second sets are
broadcast to set-top terminals (STT) 108 within the broadcast range. The broadcast range
20 may comprise all terminals 108 downstream from the head-end 102 or local neighborhood equipment 104. Only the non-redundant content needs to be broadcast. The broadcast is performed within the allocated in-band bandwidth.

Figure 2B depicts a topology 250 for broadcasting IPG pages in
accordance with an embodiment of the present invention. The topology 250 relates to the
25 push method 200 of Fig. 2A. As shown in Fig. 2B, the IPG pages are transmitted from the head-end (HE) 102 or local neighborhood equipment (LNE) 104 downstream within the illustrative communications network 100. As shown in Fig. 2B, the broadcast is pushed from the HE 102 or LNE 104 to the distribution nodes 106 and finally to the multitude of set-top terminals 108.

Figure 3A is a flow chart showing a pull method 300 for pointcasting IPG pages in accordance with an embodiment of the present invention. As described below, the method 300 includes three steps.

In a first step 302, a request for an IPG page is received from a STT 108.

- 5 The request is transmitted upstream from the STT 108 to the HE 102 or LNE 104 by way of the communications network 100. The upstream transmission may be done via an out-of-band network. Alternatively, the upstream transmission may be done via an in-band network. Such a request may comprise, for example, a look ahead request where a user wishes to view programming for a time period ahead of the current time period. For a
- 10 system where a set or sets of IPG pages are already being broadcast per Figs. 2A and 2B, the STT 108 may first check to see whether or not the requested IPG page is already being broadcast before transmitting the request upstream.

- In a second step 304, bandwidth to pointcast the requested IPG page is allocated in the distribution system for that purpose. For example, as described below in
- 15 relation to Figs. 7 and 8, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 allocates within the in-band network the necessary bandwidth to pointcast the requested IPG page to the requesting STT 108. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then no additional bandwidth for a pointcast need be allocated.

- 20 In a third step 306, the requested IPG page is pointcast to the requesting set-top terminal (STT) 108. The pointcast need only be received by the requesting STT 108 and does not need to be received by other STTs 108. The pointcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the requesting STT 108. The pointcast is performed within the allocated in-band bandwidth.
- 25 If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the pointcast need not be performed.

- Figure 3B depicts a topology 350 for pointcasting IPG pages in accordance with an embodiment of the present invention. The topology 350 relates to the pull method 300 of Fig. 3A. As shown in Fig. 3B, the request is transmitted upstream from
- 30 the requesting STT 108 to the HE 102 or LNE 104 via illustrative communications

network 100. Subsequently, the requested IPG page is pointcast downstream from the HE 102 or LNE 104 to the requesting STT 108 via the network 100.

Figure 4A is a flow chart showing a push method 400 for narrowcasting an IPG page (or multiple IPG pages) in accordance with an embodiment of the present invention. As described below, the method 400 includes three steps.

In a first step 402, an IPG page is selected to be narrowcast to a group of terminals 108. For example, the group of terminals may be a group comprising a high concentration of users with a particular ethnicity or special interest, and the IPG page selected may comprise programming targeted to that ethnic group or special interest group. As another example, the group of terminals may comprise terminals 108 in a school campus or business, and the IPG page selected may comprise class instruction or other targeted material. The group 452 may include terminals 108 in one geographic area or terminals 108 dispersed among different geographic areas but linked, for example, via a network group address.

In a second step 404, bandwidth to narrowcast the selected IPG pages is allocated in the distribution system for that purpose. For example, as described below in relation to Figs. 7 and 8, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 allocates within the in-band network the necessary bandwidth to narrowcast the selected IPG page to the group 452 of terminals 108. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then no additional bandwidth for a narrowcast need be allocated.

In a third step 406, the selected IPG page is narrowcast to the group of terminals 108. The narrowcast need only be received by terminals 108 within the group 452 and does not need to be received by other STTs 108. The narrowcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the group 452 of terminals 108. The narrowcast is performed within the allocated in-band bandwidth. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the narrowcast need not be performed.

Figure 4B depicts a push topology 450 for narrowcasting IPG pages in accordance with an embodiment of the present invention. The topology 450 relates to the push method 400 of Fig. 4A. As shown in Fig. 4B, the IPG page is transmitted from the

head-end (HE) 102 or local neighborhood equipment (LNE) 104 downstream within the illustrative communications network 100. As shown in Fig. 4B, the narrowcast is pushed from the HE 102 or LNE 104 to one or more distribution nodes 106 and finally to the terminals 108 within the group 452.

5 Figure 5A is a flow chart showing a pull or demandcast method 500 for narrowcasting IPG pages in accordance with an embodiment of the present invention. As described below, the method 500 includes three steps.

10 In a first step 502, a request for an IPG page is received from a requesting STT 552. The request is transmitted upstream from the requesting STT 552 to the HE 102 or LNE 104 by way of the communications network 100. The upstream transmission may be done via an out-of-band network. Alternatively, the upstream transmission may be done via an in-band network. Such a request may comprise, for example, a look ahead request where a user wishes to view available special interest programming for a time period ahead of the current time period. For a system where a set or sets of IPG pages are already being broadcast per Figs. 2A and 2B, the requesting STT 552 may first check to see whether or not the requested IPG page is already being broadcast before transmitting the request upstream.

15 In a second step 504, bandwidth to narrowcast the requested IPG page is allocated in the distribution system for that purpose. For example, as described below in relation to Figs. 7 and 8, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 allocates within the in-band network the necessary bandwidth to narrowcast the requested IPG page to a group 554 of terminals which includes the requesting STT 552. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then no additional bandwidth for a pointcast need be allocated. The group 554 may include terminals 108 in one geographic area or terminals 108 dispersed among different geographic areas but linked, for example, via a network group address.

20 In a third step 506, the requested IPG page is narrowcast to the group 554 of terminals 108. The narrowcast need only be received by terminals 108 within the group 554 and does not need to be received by other STTs 108. The narrowcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the group 554 of terminals 108. The narrowcast is performed within the allocated in-band

bandwidth. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the narrowcast need not be performed.

Figure 5B depicts a pull or demandcast topology 550 for narrowcasting IPG pages in accordance with an embodiment of the present invention. The topology 550 relates to the pull method 500 of Fig. 5A. As shown in Fig. 5B, the request is transmitted upstream from the requesting STT 552 to the HE 102 or LNE 104 via illustrative communications network 100. Subsequently, the requested IPG page is narrowcast downstream from the HE 102 or LNE 104 to the group 554 which includes the requesting STT 108 via the network 100.

Figure 6A is a flow chart showing a method 600 for shared pointcasting of IPG pages in accordance with an embodiment of the present invention. As described below, the method 600 includes five steps.

In a first step 602, a request for an IPG page is received from a first STT 652. The request is transmitted upstream from the first STT 652 to the HE 102 or LNE 104 by way of the communications network 100. The upstream transmission may be done via an out-of-band network. Alternatively, the upstream transmission may be done via an in-band network. Such a request may comprise, for example, a look ahead request where a user wishes to view programming for a time period ahead of the current time period. For a system where a set or sets of IPG pages are already being broadcast per Figs. 2A and 2B, the first STT 652 may first check to see whether or not the requested IPG page is already being broadcast before transmitting the request upstream.

In a second step 604, a stream 656 is assigned to pointcast the requested IPG page is allocated in the distribution system for that purpose. For example, as described below in relation to Figs. 7 and 8, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 assigns the stream 656 to pointcast the requested IPG page to the first STT 652. The stream assignment may be made, for example, by assigning a particular value to the program identifier (PID) for the stream 656. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the stream assignment need not be made.

In a third step 606, the requested IPG page is pointcast to the first STT 652 via the assigned stream 656. This may be done by transmitting packets that are identified

by the particular PID value and contain the video sequence of the requested IPG page. The pointcast need only be received by the first STT 652 and does not need to be received by other STTs 108. The pointcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the first STT 652. If the requested IPG page is already
5 being broadcast per Figs. 2A and 2B, then the pointcast need not be performed.

In a fourth step 608, a request for an IPG page is received from a second STT 654, where the IPG page requested is the same IPG page as the one requested by the first STT 652 in the first step 602. Like the first request, this second request is transmitted upstream from the second STT 654 to the HE 102 or LNE 104 by way of the
10 communications network 100 via either an out-of-band network or via an in-band network. The second STT 654 may be either in the same geographic area as the first STT 652, or the second STT 654 may be in a different geographic area as the first STT 652.

Either way, in a fifth step 610, the identifier (e.g., PID value) for the stream 656 is transmitted from the HE 102 or LNE 104 to the second STT 654. This
15 enables the next step 612 to occur without use of additional PIDs or additional network bandwidth.

Finally, in a sixth step 612, the second STT 654 receives the requested IPG page via the same stream 656 as that which delivers the IPG page to the first STT 652. This may be done, for example, by setting the second STT 654 to decode and present
20 packets that are identified by the particular PID value for the stream 656. Such packets are the ones which contain the video sequence of the requested IPG page. In this manner, "sharing" of the stream 656 occurs, changing the previously "single" pointcast to a "double" pointcast.

Similarly, additional terminals 108 may "share" the pointcast by
25 requesting the same IPG page and receiving it via the same stream 656. In this way, any number of terminals 108 may share the pointcast. This results in more efficient use of limited bandwidth.

Figure 6B depicts a pull or demandcast topology 650 for shared pointcasting of IPG pages in accordance with an embodiment of the present invention.
30 The topology 650 relates to the pointcast "sharing" method 600 of Fig. 6A. As shown in Fig. 6B, a request is transmitted upstream from the first STT 652 to the HE 102 or LNE

104 via illustrative communications network 100. In response, the requested IPG page is pointcast by way of a stream 656 from the HE 102 or LNE 104 to the first STT 652.

Next, a second request for the same IPG page is transmitted upstream from the second STT 654 to the HE 102 or LNE 104 via the network 100. In response, the identifier for

5 the stream 656 is transmitted from the HE 102 or LNE 104 to the second STT 654.

Subsequently, the second STT 654 uses the identifier to receive the IPG page from that same stream 656.

Figure 6C is a flow chart showing a method 660 of terminating (or continuing) shared pointcasts of IPG pages in accordance with an embodiment of the
10 present invention. As described below, the method 660 includes five steps.

In a first step 662, an STT finishes viewing a stream which transmits an IPG page. In the example discussed above with respect to Figs. 6A and 6B, the STT may be either the first STT 652 or the second STT 654. In general, the STT may be any of multiple terminals which are sharing the stream, or the STT may be the last terminal to be
15 viewing a stream which was previously shared.

In a second step 664, the HE 102 or LNE 104 is notified that the STT has finished viewing the stream. Such a notification occurs by the STT sending a communication upstream to the HE 102 or LNE 104 by way of an out-of-band or in-band network.

20 In a third step 666, a determination is made as to whether or not that stream is still being viewed by one or more STTs. This determination is done within the HE 102 or LNE 104 and may be done by a bandwidth manager 728 or 828 in conjunction with a session manager 724 or 824.

25 In a fourth step 668, if one or more STTs are still viewing that stream, then transmission of the stream by the HE 102 or LNE 104 continues. Such transmission is typically performed by the in-band delivery system 728 or 828 within the HE 102 or LNE 104.

Finally, in a fifth step 670, if no more STTs are still viewing that stream, then the stream is "torn down" so that it is no longer transmitted and no longer takes up

network bandwidth. The torn down stream is made available for reassignment to reuse the bandwidth to transmit a different pointcast, narrowcast, or broadcast.

Figure 7 depicts a first system 700 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention. The first system 700 includes a key manager 702, a subscription/billing manager 704, an IPG generator 706, and a head-end 102.

The head-end 102 is coupled to a multitude of STTs 108 by way of both an in-band network and an out-of-band (OOB) network. The head-end 102 includes various components which are coupled together and interact with each other. The head-end 102 illustrated includes an advertising/html content source 708, an IPG content source 709, a compositor 710, an encoder 712, a processor 714, a multiplexor 716, an encryptor 718, an in-band delivery system 720, a controller 722, a session manager 724, an access manager 726, a bandwidth manager 728, and out-of-band (OOB) equipment 730.

Figure 8 depicts a second system 800 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention. The second system 800 includes the components of the first system 700. In addition, the second system 800 includes local neighborhood equipment 104 and a video-on-demand (VOD) server 802.

The LNE 104 is coupled to the HE 102 by way of an in-band network and an OOB messaging system. The LNE 104 is also coupled to a multitude of STTs 108 by way of a local in-band network. The LNE 104 includes various components which are coupled together and interact with each other. The type of components in the LNE 104 are typically a subset of the type of components in the HE 102. The LNE 104 illustrated includes a processor 814, a multiplexor 816, an encryptor 818, a local delivery system 820, a controller 822, a session manager (SM) 824, an access manager (AM) 826, and a bandwidth manager (BWM) 828.

The first and second systems 700 and 800 described above are illustrative systems which may be used to implement the present invention. They are not meant to limit the present invention to those specific embodiments.

Figure 9 depicts an example of one frame taken from a video sequence of an IPG page in accordance with the present invention. The IPG page 900 of Figure 9 comprises a first 905A, second 905B and third 905C time slot objects, a plurality of channel content objects 910-1 through 910-8, a pair of channel indicator icons 941A, 941B, a video barker 920 (and associated audio barker), a cable system or provider logo 915, a program description region 950, a day of the week identification object 931, a time of day object 939, a next time slot icon 934, a temporal increment/decrement object 932, a "favorites" filter object 935, a "movies" filter object 936, a "kids" (i.e., juvenile) programming filter icon 937, a "sports" programming filter object 938 and a VOD programming icon 933. It should be noted that the day of the week object 931 and next time slot icon 934 may comprise independent objects (as depicted in Figure 9) or may be considered together as parts of a combined object.

In a system, illustratively, comprising 80 channels of information, the channels are displayed in 8-channel groups having associated with them three hour time slots. In this organization, it is necessary to provide 10 video PIDs to carry the present-time channel/time/title information, one or more audio PID to carry the audio barker and/or one or more data PID (or other data transport method) to carry the program description data, overlay data and the like. To fully broadcast interactive program information up to 24 hours in advance, it is necessary to provide 160 ($10 \times 24 / 1.5$) video PIDs, along with one or more audio and, optionally, one or more data PIDs. The amount of time provided for in broadcast video PIDs for the given channel groups comprises the time depth of the program guide, while the number of channels available through the guide (compared to the number of channels in the system) provides the channel depth of the program guide. In a system providing only half of the available channels via broadcast video PIDs, the channel depth is said to be 50%. In a system providing 12 hours of time slot "look-ahead," the time depth is said to be 12 hours. In a system providing 16 hours of time slot "look-ahead" and 4 hours of time slot "look-back," the time depth is said to be +16/-4 hours.

The video streams representing the IPG are carried in a single transport stream or multiple transport streams, within the form of a single or multi-programs as discussed previously in this invention. A user desiring to view the next 1.5 hour time interval (e.g., 9:30 – 11:00) may activate a "scroll right" object (or move the joystick to

the right when a program within program grid 902 occupies the final displayed time interval). Such activation results in the controller of the STT noting that a new time interval is desired. The video stream corresponding to the new time interval is then decoded and displayed. If the corresponding video stream is within the same transport stream (i.e., a new PID), then the stream is immediately decoded and presented. If the corresponding video stream is within a different transport stream, then the related transport stream is extracted from the broadcast stream and the related video stream is decoded and presented. If the corresponding transport stream is within a different broadcast stream, then the related broadcast stream is tuned, the corresponding transport stream is extracted, and the desired video stream is decoded and presented.

A user interaction resulting in a prior time interval or a different set of channels results in the retrieval and presentation of a related video stream. If the related video stream is not part of the broadcast video streams, then a pointcast session is initiated as described above in relation to Figs. 3A and 3B. For this purpose, the STT sends a request to the head end via the back channel requesting a particular stream. The head end then processes the request, retrieves the related stream from the information server, incorporates the stream within a transport stream as a video PID (preferably, the transport stream currently being tuned/selected by the STT) and informs the STT which PID should be received, and from which transport stream it should be demultiplexed. The STT then retrieves the related video PID. In the case of the video PID being within a different transport stream, the STT first demultiplexes the corresponding transport stream (possibly tuning a different QAM stream within the forward channel).

Normally, upon completion of the viewing of the desired stream, the STT indicates to the head end that it no longer needs the stream, whereupon the head end tears down the pointcast session. The viewer is then returned to the broadcast stream from which the pointcast session was launched. However, as described above in relation to Figs. 6A, 6B, and 6C, the method for “sharing” pointcasts may avoid the need to tear down the pointcast session if another STT is still utilizing the pointcast. In addition, the above described pointcast sharing technique more efficiently utilizes the network bandwidth allocated to pointcasts.

WHAT IS CLAIMED IS:

1 1. A method for managing delivery of video sequences of an
2 interactive program guide (IPG) over a communications network to a plurality of
3 terminals, the method comprising:
4 pre-allocating a broadcast bandwidth in the communications network for
5 common video sequences to be transmitted by a broadcast technique;
6 transmitting in the broadcast bandwidth the common video sequences to
7 the plurality of terminals by way of the broadcast technique;
8 receiving a request for a specific video sequence from a specific terminal
9 via the communications network;
10 allocating a demandcast bandwidth in the communications network for the
11 specific video sequence; and
12 transmitting in the demandcast bandwidth the specific video sequence to
13 the specific terminal via the communications network.

1 2. The method of claim 1, wherein the common video sequences are
2 delivered using an in-band portion of the communications network.

1 3. The method of claim 2, wherein the specific video sequence is
2 delivered using the in-band portion of the communications network.

1 4. The method of claim 3, wherein the requests are received using an
2 out-of-band portion of the communications network.

1 5. The method of claim 4, wherein the common video sequences
2 comprise IPG pages for a current time period.

1 6. The method of claim 5, wherein the common video sequences
2 further comprise IPG pages for a prime viewing time period.

1 7. The method of claim 1, wherein transmitting the specific video
2 sequence is performed using a narrowcast technique to a group of terminals which
3 includes the specific terminal.

1 8. The method of claim 1, wherein transmitting the specific video
2 sequence is performed using a pointcast technique.

1 9. The method of claim 8, wherein the pointcast technique comprises
2 a shared pointcast technique.

1 10. A method for managing delivery of a plurality of video sequences
2 that comprise interactive program guide (IPG) pages, the method comprising:
3 predetermining a set of video sequences to be broadcast;
4 allocating a broadcast bandwidth within a network with a finite bandwidth
5 for the set of video sequences;
6 broadcasting the set of video sequences via the broadcast bandwidth to a
7 plurality of terminals;
8 receiving a request from a specific terminal for a specific video sequence
9 which is not within the set of video sequences to be broadcast;
10 allocating a demandcast bandwidth within the network for the specific
11 video sequence;
12 transmitting the specific video sequence via the demandcast bandwidth to
13 the specific terminal to fulfill the request.

1 11. The method of claim 10, wherein the broadcasting and transmitting
2 occur by way of in-band communications in the network, and the receiving occurs by way
3 of out-of-band communications in the network.

1 12. The method of claim 11, wherein the first set of video sequences
2 comprises IPG pages for a current time period.

1 13. The method of claim 10, further comprising:
2 predetermining a second set of video sequences to be broadcast; and
3 allocating a second broadcast bandwidth within the network for the second
4 set of video sequences; and
5 broadcasting via the second broadcast bandwidth the second set of video
6 sequences to the plurality of terminals.

1 14. The method of claim 13, wherein the second set of video sequences
2 comprises IPG pages for prime viewing time periods

1 15. The method of claim 10, wherein transmitting the specific video
2 sequence to the specific terminal comprises pointcasting the specific video sequence to
3 the specific terminal.

1 16. The method of claim 15, wherein transmitting the specific video
2 sequence to the specific terminal comprises narrowcasting the specific video sequence to
3 a group of terminals which includes the specific terminal.

1 17. The method of claim 10, further comprising:
2 predetermining a particular video sequence to be narrowcast to a group of
3 terminals;
4 allocating a narrowcast bandwidth within the network for the particular
5 video sequence; and
6 narrowcasting the particular video sequence via the narrowcast bandwidth
7 to the group of terminals.

1 18. The method of claim 10, further comprising:
2 receiving a second request from a second specific terminal for the specific
3 video sequence; and
4 transmitting the specific video sequence via the demandcast bandwidth to
5 the second terminal,
6 wherein the demandcast bandwidth comprises a single stream which is
7 used to transmit the specific video sequence to both terminals.

1 19. The method of claim 18, further comprising:
2 one terminal from a group including both terminals finishing use of the
3 specific video sequence; and
4 continuing transmission of the specific video sequence via the demandcast
5 bandwidth.

1 20. The method of claim 19, further comprising:
2 another terminal from the group finishing use of the specific video
3 sequence; and
4 discontinuing transmission of the specific video sequence; and
5 making the demandcast bandwidth available for re-allocation.

BANDWIDTH MANAGEMENT TECHNIQUES FOR DELIVERY OF INTERACTIVE PROGRAM GUIDE

ABSTRACT OF THE DISCLOSURE

In order to enable more efficient utilization of the finite bandwidth available for distribution of interactive program guide (IPG) video sequences, novel systems and methods are introduced to provide bandwidth management to handle broadcast, narrowcast, pointcast, and "shared" pointcast streams in combination. Bandwidth management techniques in an end-to-end system play a key role in latency reduction and improving overall efficiency of the interactive system.

Methods for managing delivery of video sequences for an IPG to a plurality of terminals are described. The methods comprise delivery by way of various techniques, including broadcasting, pointcasting, narrowcasting, and variants and combinations of those techniques.

PA 3050223 v1



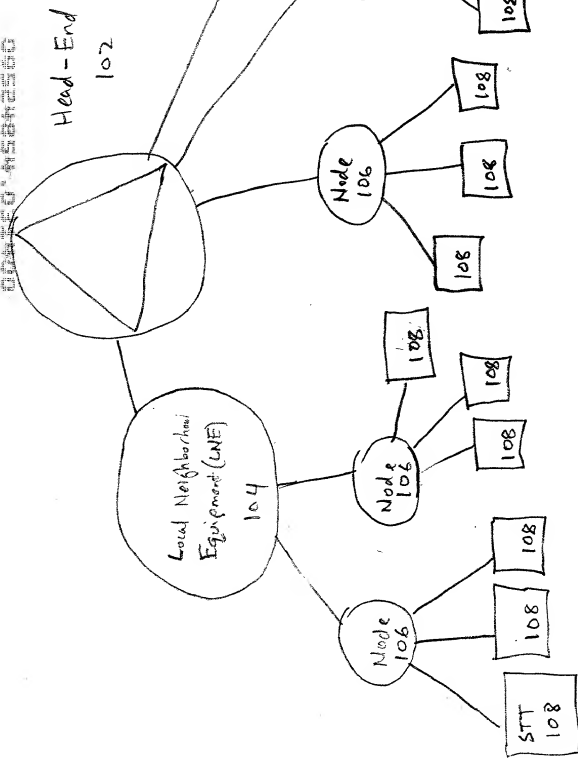


Fig. 1 100

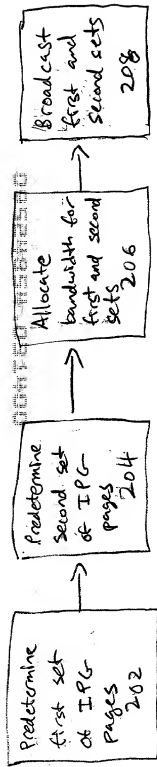


Broadcast (push) method 200

Fig. 2A

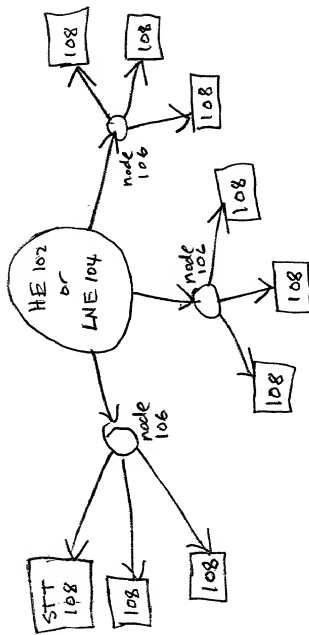

Broadcast (push) Topology 250


Fig. 2B

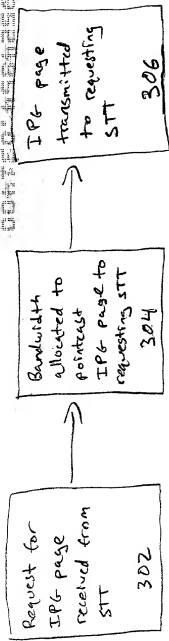

Pointcast (pull or demandcast) Method

300


Fig. 3A

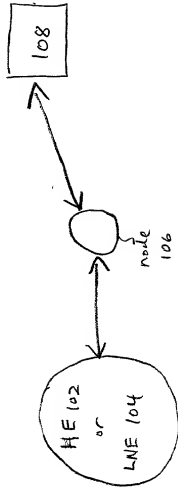

Pointcast (pull or demandcast) Topology


350

Fig. 3B

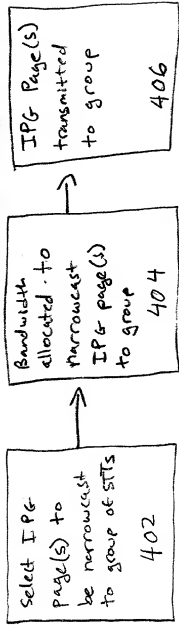


Narrowcast (push) method

Fig. 4A

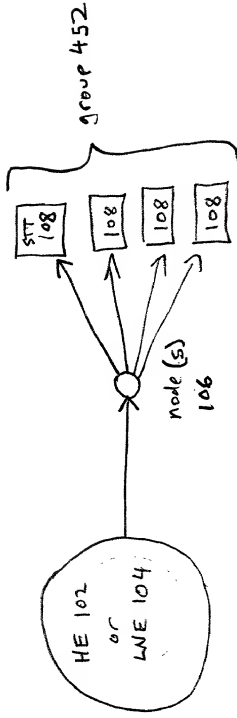


Narrowcast (push) Topology

Fig. 4B

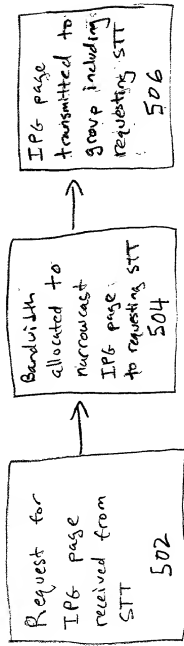


Narrowcast (pull or Demandcast) method 500

Fig. 5A

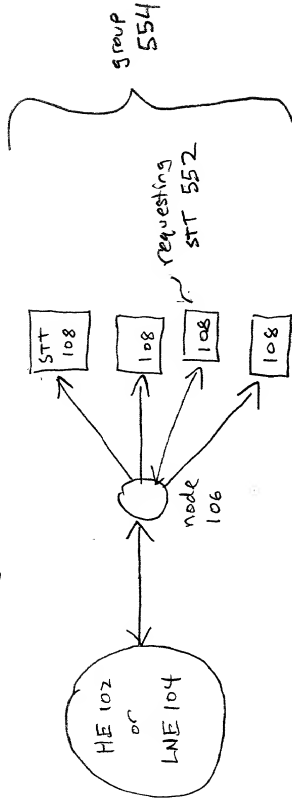


Narrowcast (pull or Demandcast) Topology 550

Fig. 5B

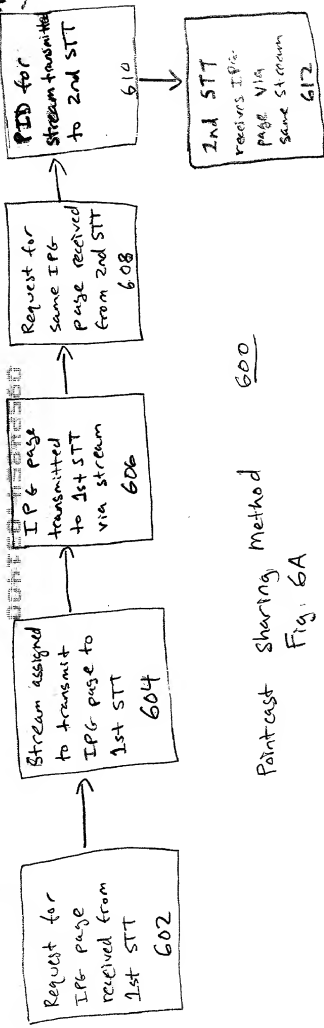

Pointcast Sharing Method
Fig. 6A
600

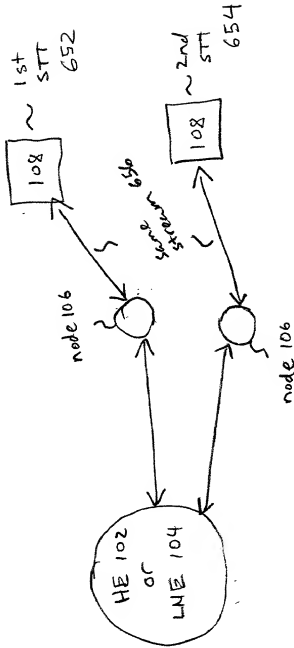

Pointcast Sharing Topology
650

Fig. 6B

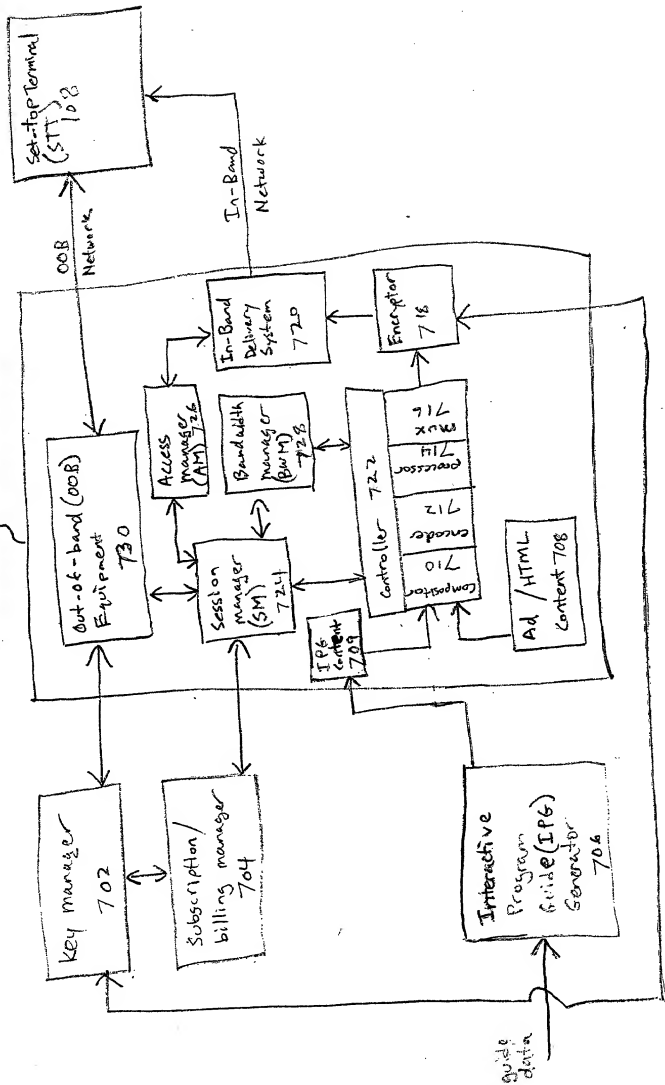


FIG. 7 700


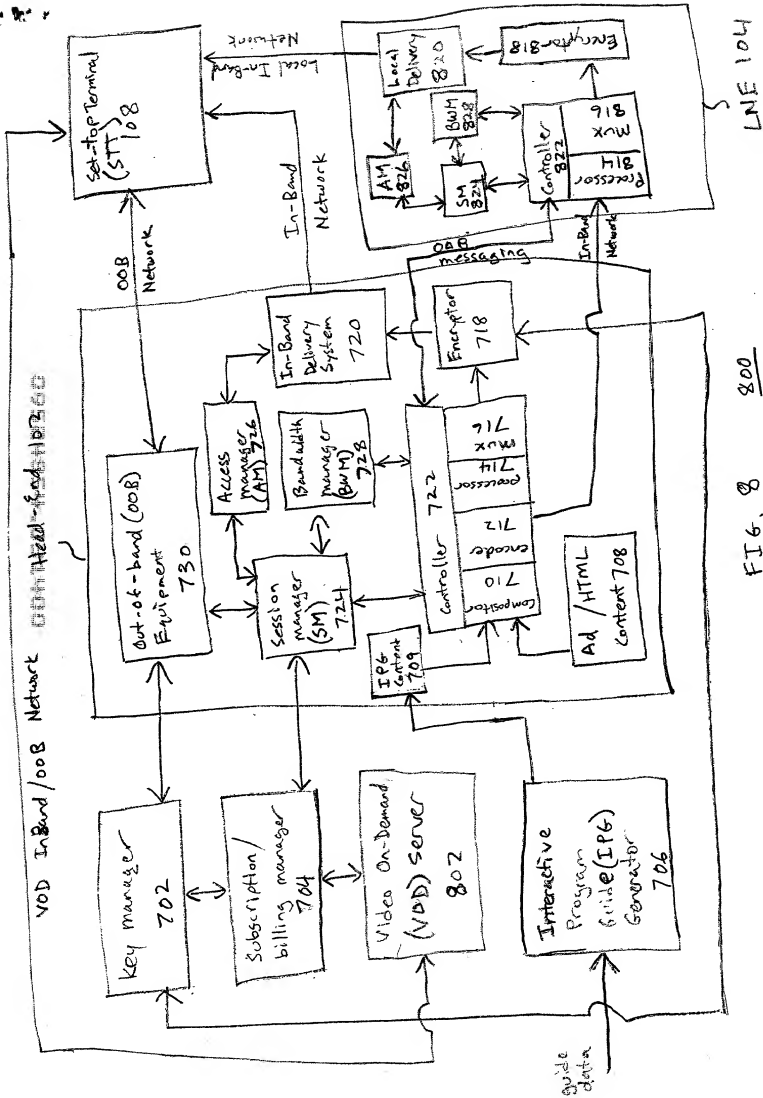


FIG. 8

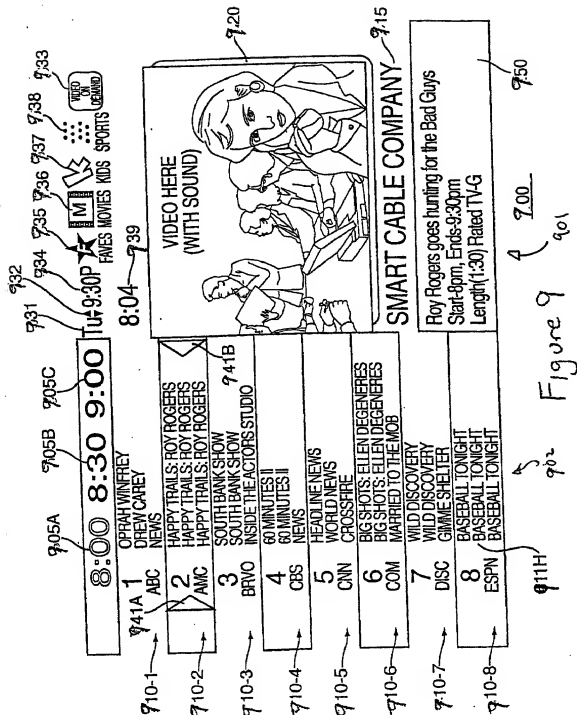

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **BANDWIDTH MANAGEMENT TECHNIQUES FOR DELIVERY OF INTERACTIVE PROGRAM GUIDE** the specification of which is attached hereto.

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Country	Application No.	Date of Filing	Priority Claimed Under 35 USC 119

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Date of Filing	Status

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

James K. Okamoto, Reg. No. 40,110
William L. Shaffer, Reg. No. 37,234

Send Correspondence to:
James K. Okamoto
TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834

Direct Telephone Calls to:
(Name, Reg. No., Telephone No.)
Name: James K. Okamoto
Reg. No.: 40,110
Telephone: 650-326-2400

Full Name of Inventor 1:	Last Name: Bayrakeri	First Name: Sadik	Middle Name or Initial:	
Residence & Citizenship:	City: Foster City	State/Foreign Country: CA	Country of Citizenship: Turkey	
Post Office Address:	Post Office Address: 733 Shell Boulevard, #104	City: Foster City	State/Country: CA	Postal Code: 94404
Full Name of Inventor 2:	Last Name: Gordon	First Name: Donald	Middle Name or Initial: F.	
Residence & Citizenship:	City: Los Altos	State/Foreign Country: CA	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 465 Gabilan Street, #10	City: Los Altos	State/Country: CA	Postal Code: 94022
Full Name of Inventor 3:	Last Name: Ludvig	First Name: Edward	Middle Name or Initial: A.	
Residence & Citizenship:	City: Redwood City	State/Foreign Country: CA	Country of Citizenship: Canada	
Post Office Address:	Post Office Address: 831 Canyon Road	City: Redwood City	State/Country: CA	Postal Code: 94061
Full Name of Inventor 4:	Last Name: Gershtein	First Name: Eugene	Middle Name or Initial:	
Residence & Citizenship:	City: Redwood Shores	State/Foreign Country: CA	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 401B Cork Harbour Circle	City: Redwood Shores	State/Country: CA	Postal Code: 94065
Full Name of Inventor 5:	Last Name: Edmonds	First Name: Jeremy	Middle Name or Initial: S.	
Residence & Citizenship:	City: Castro Valley	State/Foreign Country: CA	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 18923 Sydney Circle	City: Castro Valley	State/Country: CA	Postal Code: 94546
Full Name of Inventor 6:	Last Name: Comito	First Name: John	Middle Name or Initial: P.	
Residence & Citizenship:	City: Redwood City	State/Foreign Country: CA	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 907 Pleasant Hill Road	City: Redwood City	State/Country: CA	Postal Code: 94061
Full Name of Inventor 7:	Last Name: Li	First Name: Alfred	Middle Name or Initial:	
Residence & Citizenship:	City: Redwood City	State/Foreign Country: CA	Country of Citizenship: Hong Kong	
Post Office Address:	Post Office Address: 161 Positano Circle	City: Redwood City	State/Country: CA	Postal Code: 94065

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.